

For: File Resubmit Approval Other _____

V3036B-1EA2/EA3AX 3.0-ton iSeries Vertical AHU

iSERIES

Job Name:	Location:
Date:	Tag #:
Architect:	Engineer:
Mechanical:	Distributor:
Rep:	

(Company)

(Project Manager)



Features

- Easy service EC Motor (Variable Speed)
- Removable access panels for ease of service
- ASHRAE 62.2-2010 ventilation mode
- Use as cooling only or heat pump
- Optional hot water coil for heating
- Heavy-duty closed cell insulation (no exposed fiberglass insulation)
- Includes (shipped loose):
 - Clear PVC condensate trap
 - S.M.A.R.T. control board

Compatible Outdoor Unit
IS36G110

Indoor Unit
D

General Data:

Fan Speeds	Variable
Maximum Motor Speed	1800 RPM
Nominal Airflow	600 CFM (283 L/s)
Static Pressure at Nominal Airflow	1.5 in. w.g. (0.373 kPa)
Sound Pressure (high)	56 dB(A)
Rated performance	see AHRI directory*
Net coil face area	3.50 ft ² (0.33 m ²)
Tube diameter	3/8 in. (9.52 mm)
Number of rows	3
Number of Circuits	6
Fin density	15/in. (590/m)
Design pressure	500 psig (3.45 MPa)
Refrigerant type	R410A
Suction line size	3/4 in. (19.05 mm) OD
Liquid line size	3/8 in. (9.52 mm) OD
Drain size	3/4in FNPT
Net unit weight	138 lbs. (63 kg)
Shipping Weight	200 lbs. (91 kg)

* www.ahridirectory.org

Operating Range

Nominal Capacity	3.0-ton (10.5 kW)
Airflow Range	300 to 900 CFM (510 to-1530)m ³ /h)

Electrical:

Motor Type	1EA2/1EA3
Electrical Power	1Ph, 50/60 Hz, 1 HP (0.75kW)
Voltage	208-230 V
Min. Circuit Ampacity	7.7 A
Max. Overcurrent	15 A
Protection	
Motor Full Load Current	3.1 A
Allowable Breaker Sizes	15 A

Optional Accessories

- Hot water coil (HW-3036)
- Control box extension cable, 98" (2.5 m) (A01525-G02)

Notes:

1. All wiring and piping must comply with applicable local and national code
2. Absolute operating voltage range: 198 – 253V.
3. Refer to installation manual for more information.

Model Number Key:

V	3036	B	-	1	EA*	A	X
Model Series	Matching ODU Nominal Capacity	Configuration		Revision	Motor Style	Cooling Coil	Heating Coil
V = Vertical	3036 = 30000 to 36000 Btu/hr	B = Both			EA2 = 208 – 230V (US) EA3 = 208 – 230V (EU)	A = 3 rows	X = None H = Hot Water Coil

ODU = Outdoor Unit

V3036B-1EA2/EA3AX


Job Name:

Location:


Date:

Tag #:

RETURN AIR PLENUM MODULE DIMENSIONS

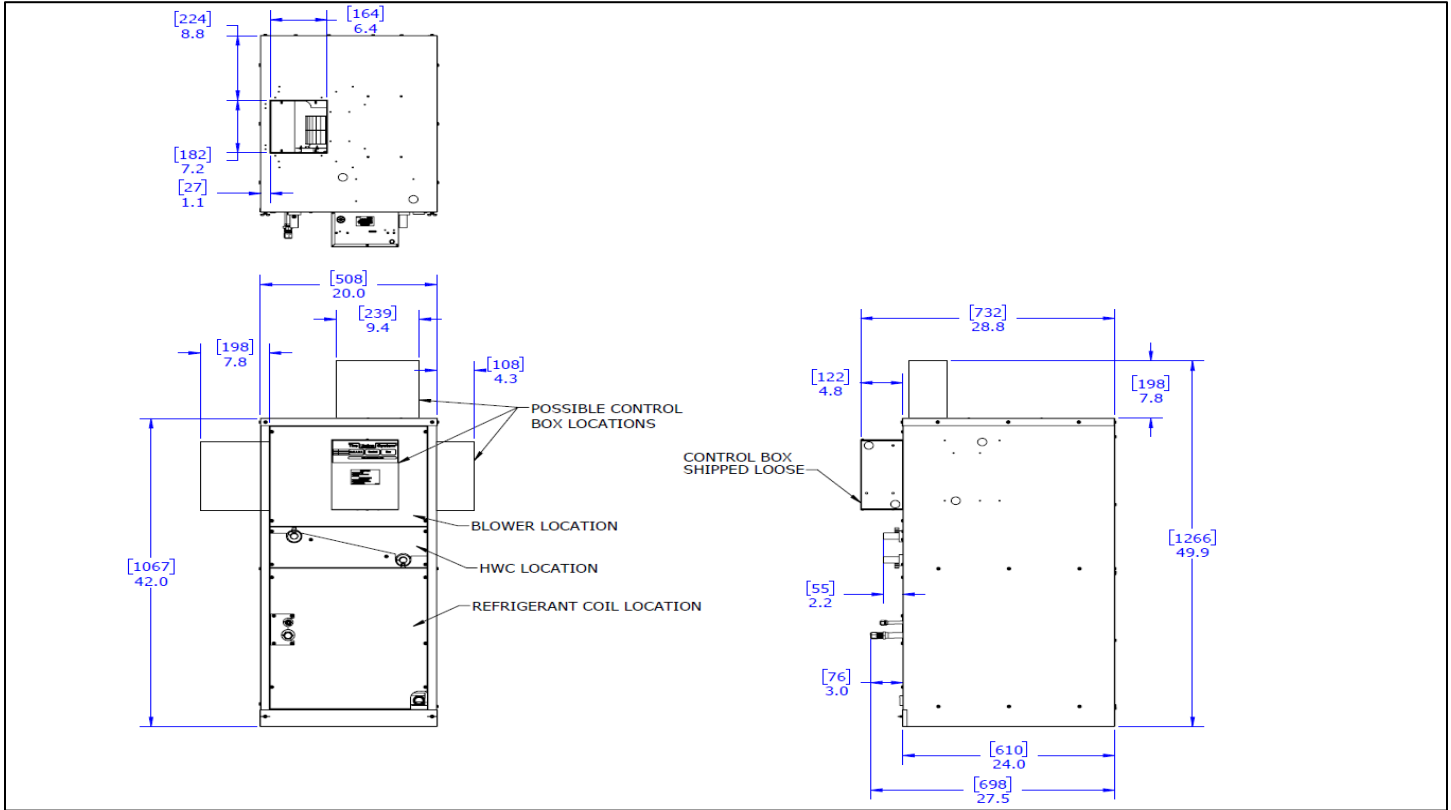

* Contact Unico for dimensions of assembled modules.

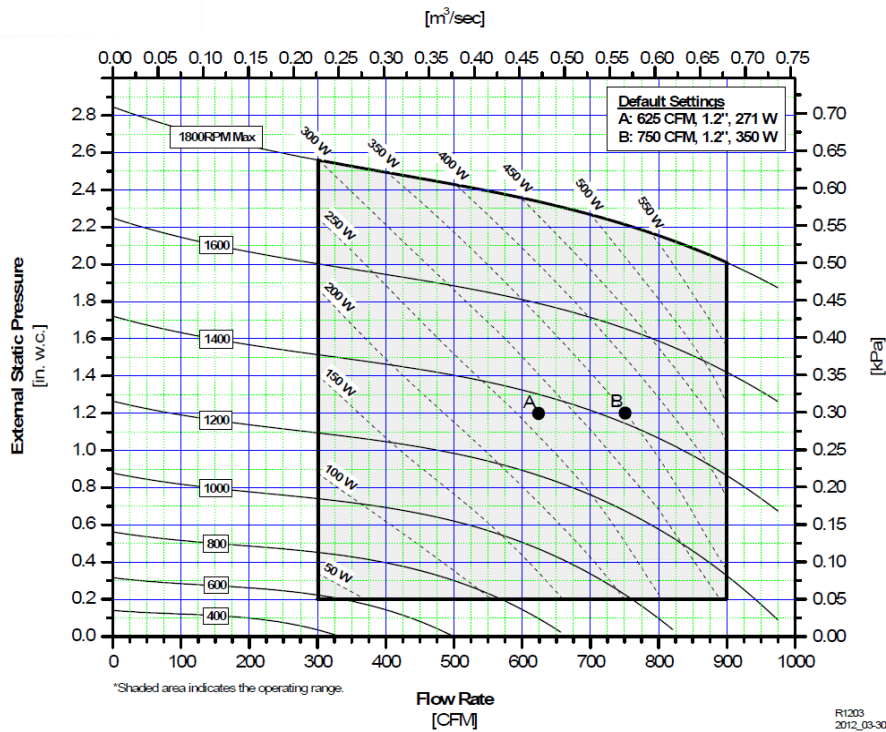

R1203
2012_03-30

Unico, Inc.
<http://tech.unicosystem.com>
 314-481-9000
 800-527-0896
sales@unicosystem.com

