

# Universal Thermostat



- Hardwired or Battery Powered
- Button or Touchscreen User Interface
- Single Stage or Multi-Stage



## A00915-G03

White-Rodgers 1F80-0477

Single Stage  
5/1/1, 5/2 Day, or ∅ Programmable  
Includes Wall Plate F61-2634

## A00915-G04


White-Rodgers 1F85-0478

Multi-Stage  
5/1/1, 5/2 Day, or ∅ Programmable  
Includes Wall Plate F61-2634


## A00915-G05

White-Rodgers 1F95-1292

Universal Single or Multi-Stage  
Touchscreen  
7 Day, 5/1/1, or ∅ Programmable

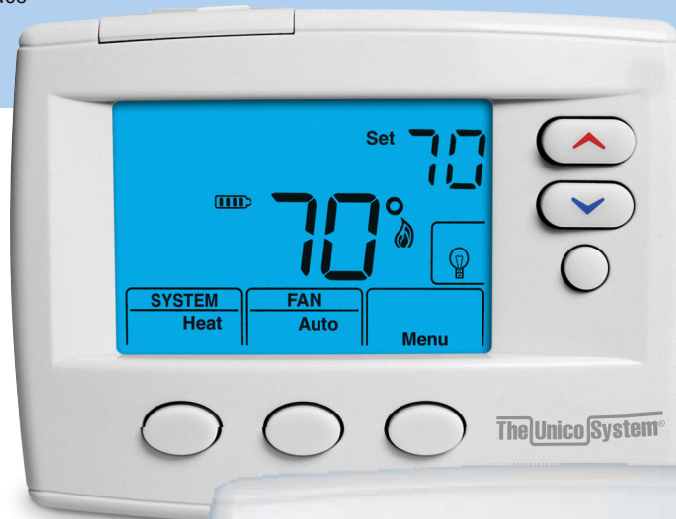

Soft-touch Buttons  
(A00915-G03, A00915-G04)

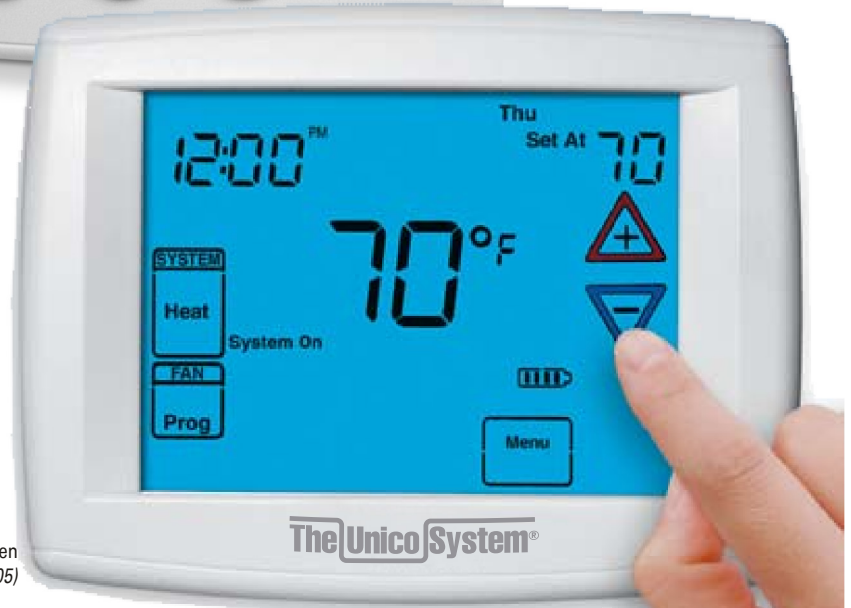

Large Touch Screen  
(A00915-G05)

Unico thermostats feature easy-to-view, large blue displays, for easy programming without distraction. These thermostats are made exclusively for Unico by White-Rodgers and include all the standard features of their 80 Series® and 90 Series® thermostats. Available in three models — Good, Better, and Best — these thermostats are compatible with all Unico System air handlers and Unichiller systems.

**A00915-G03/-G04 Features**

Large, 4-square-inch (26 cm<sup>2</sup>) Blue display with easy-to-see characters  
 Quick one-button programming (See Automatic Schedule section in installation instructions)  
 Configures as manual heat/cool, auto changeover, heat only, or cool only  
 Exclusive Cool Savings™ feature saves energy during peak A/C demand periods  
 Hydronic 2 or 3 wire applications  
 Three anticipation settings  
 Exclusive battery power monitor  
 Longer battery life  
 Easy-access battery compartment  
 5-year warranty

**A00915-G05 Features**

All A00915-G03 features, plus:  
 Large, 12-square-inch (77 cm<sup>2</sup>) Blue Touchscreen display with 10-second backlight  
 Dual fuel heat pump control  
 Remote sensing indoor or outdoor and at the thermostat  
 Programmable fan  
 Circulator fan cycling  
 Automatic daylight savings option

**Programming**

Several programmable choices  
 4 time and 4 temperature settings per program (heat & cool)  
 Energy savings up to 33%  
 Patented pre-programmed software simplifies time and temperature programming

**Comfort & Convenience**

Permanent program retention during power loss  
 Indefinite setpoint Hold or programmable timed Hold up to 8 hours  
 Air filter change indicator (optional)  
 Simple "setup" menu to activate optional features  
 Temporary temperature override  
 Soft-touch keypad (A00915-G03/-G04)  
 Maintains room temperature differential within 1°  
 Display temperature recalibration (+/- 4°)

**Performance**

Dual-Powered ... choice of battery-powered or hardwired, for all applications  
 Selectable Energy Management Recovery  
 Meets ENERGY STAR® Specifications  
 Meets California Building Code, Title 24  
 Fast (FA) or slow (SL) heating cycle anticipation  
 Easy-to-wire terminal block  
 Compressor lockout protection  
 Millivolt compatible  
 Electric heat option

**Display**

Large displays for easier reading  
 Lighted display for easier low-light viewing

**Terminal Designations**



**Dimensions (W x H x D)**

4.5 x 3.5 x 1.1 inches (114 x 89 x 28 mm) - A00915-G03  
 5.1 x 3.9 x 1.2 inches (130 x 99 x 31 mm) - A00915-G04  
 4.6 x 5.9 x 1.2 inches (117 x 150 x 31 mm) - A00915-G05

**Thermal Specifications**

Setpoint Temperature Range: 45° to 90° F (7° to 32° C)  
 Rated Differential: 0.4° to 1.7° F (0.2° to 1.0° C) with adjustable anticipation  
 Operating Ambient Temperature: 32° to 105° F (0° to 40° C)  
 Operating Humidity Range: 90% non-condensing maximum  
 Shipping Temperature Range: -4° to 150° F (-20° to 65° C)

**Accessories**

Wall Plate F61-2634 included (A00915-G03, A00915-G04)  
 6.5 W x 5 H inches (165 W x 127 H mm)  
 (For thermostat guard options refer to White-Rodgers catalog at www.white-rodgers.com)  
 Standard Systems  
 Single Stage gas, oil, electric  
 Single Stage heat pump  
 Millivolt Systems  
 Multi-Stage gas, oil, electric (A00915-G04, A00915-G05)  
 Multi-Stage heat pump (A00915-G04, A00915-G05)

**Electrical Specifications**

Rating  
 0 to 30 VAC, NEC Class II, 50/60 Hz or DC  
 Maximum Current load per terminal  
 1.0 Amps (A00915-G03, A00915-G04)  
 1.5 Amps (A00915-G05)  
 Maximum load, all terminals combined  
 1.5 Amps (A00915-G03, A00915-G04)  
 2.5 Amps (A00915-G05)

**For Additional Information**

Visit [www.white-rodgers.com](http://www.white-rodgers.com)

**Thermostat Comparison**

Stages Heat/Cool by System			Model		Programs	Applications					Selectable Performance Features					Comfort & Convenience Features							
Single Stage	Multi-Stage	Heat Pump	Unico P/N	White-Rodgers P/N	Program Options	Gas/Oil Electric	3 Wire Zone Valve	Millivolt Compatible	Power Source	Auto Change-over	Heat Only or Cool Only Option	Energy Management Recovery	Energy Star	Prog-Fan	User Interface	Display Size, in <sup>2</sup> (cm <sup>2</sup> )	Alkaline Battery Life (Years)	Lighted Display	Cool Savings	Furnace Lockout Ignition Module Reset	Memory Back-up P-Permanent B-Battery	Warranty (Years)	
1/1		1/1	A00915-G03	1F80-0477	5+1+1, 5+2, 0	✓	✓	✓	B, H	✓	✓	✓	✓		B	4.0 (26)	2+	✓**	✓	✓		P	5
1/1	2/2	3/2	A00915-G04	1F85-0478	5+1+1, 5+2, 0	✓	✓	✓	B, H	✓	✓	✓	✓		B	4.0 (26)	2+	✓**	✓	✓		P	5
1/1	2/2	3/2	A00915-G05	1F95-1292	7, 5+1+1, 0	✓	✓	✓	B, H	✓	✓	✓	✓	✓	T	12.0 (77)	3	✓**	✓	✓	✓	P	5

B, H = Battery or Hardwire option

User Interface (T) Touchscreen, (B) Button

\*\* Optional Continuous Display Light with Hardwire option

