For: □ File □ Resubmit □ Approval

□ Other

M3036V1 **3-ton Vertical Return Plenum Module**

Job Name:	Location:
Date:	Tag #:
Architect:	Engineer:
Mechanical:	Distributor:

Rep:

(Company)



(Project Manager)

- Features • Built in secondary drain pan with 3/4-inch socket connection
- · Room for optional hot water coil with access from both sides
- Centrally located pleated filter
- Heavy-duty closed cell insulation (no exposed fiberglass insulation)
- Standard Unico System 'latch' system

	Matching Modules					
Γ	M3036BL1-EC1/EC2					
	M3036CL1-B					
	M3036CL1-E					
	M3036CL1-C					
	M3036CL1-H					

Indoor Unit Size

3036

General Data:

Dimensions (H x W x D)	18.25 x 30 x 17.5 in.		
	(464 x 762 x 445 mm)		
Total Return Opening	201 in ² (0.13 m ²)		
Equivalent Return Opening Diameter	16 in (406 mm)		
Filter Size	18 in x 30 in x 1 in		
	(457 mm x 762 mm)		
Maximum Airflow	900 CFM (425 L/s)		
Maximum Velocity	350 FPM (1.78 m/s)		
Initial Resistance	0.4 in. wg (100 Pa)		

Optional Accessories

- □ Hot water coil (*HW-3036*)
- □ Modular Variable Speed Air Handler (*M3036BL1-EC**)
- □ Secondary drain pan, 2 module (UPC-27B)
- Secondary drain pan, 3 module (UPC-27C)
- □ Return adapter (UPC-104-3036)

Notes:

1. Refer to installation manual for more information.

Model Number Key (available models):

М	3036	V	1	1
Model	Nominal	Module	Revision	Paint
Series	Capacity	Туре		Color
M =	3036 =	V =		None =
Modular	30000 to	Vertical		Blank
	36000	Return		1 =
	Btu/hr	Plenum		White

M3036V1


Job Name:

Location:

Date:


Tag #:

RETURN AIR PLENUM MODULE DIMENSIONS

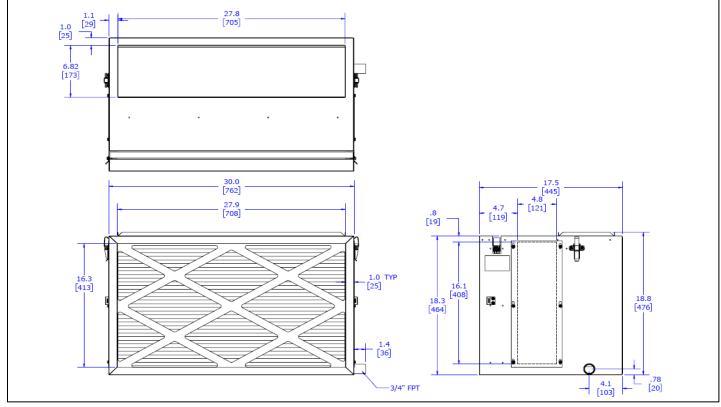

* Contact Unico for dimensions of assembled modules.

Installation Clearances

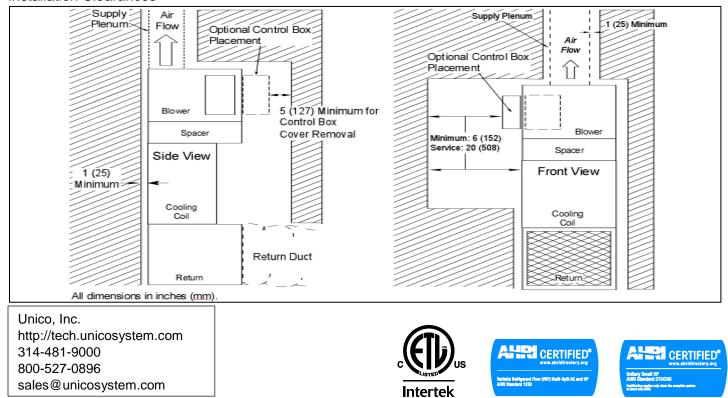

Note - for continuous product improvement, Unico reserves the right to change specifications without notice.

 $\ensuremath{\textcircled{\sc 0}}$ 2017 Unico, Inc., Arnold, MO. "Unico System" is a registered trademark of Unico, Inc.